


3/2-Way-Solenoid-Valve

Type 02.1.01.002.03

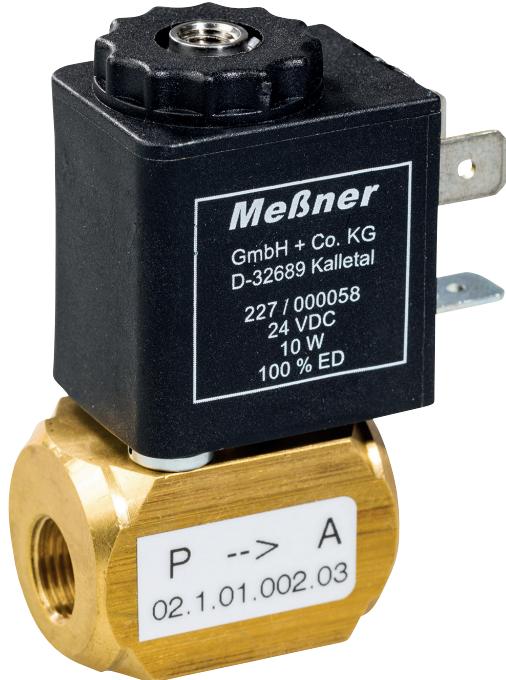

Technical data

Type of actuation	direct control
Nominal size	1,5 mm
Pump connection P	internal thread R 1/8"
Working connection A	internal thread R 1/8"
Ventilation connection R	internal thread M5
Function	normally closed NC*
Operating pressure	max. 8,0 bar
Ambient temperature	max. 80° C
Duty cycle ED	100 %
Enclosure protection in compliance with DIN 40050	IP 00 IP 65 with connector (Art.-No. 229/000003)

Power consumption

24 V/DC	10 W
24 V/AC und 230 V/AC	8,5 VA

Standard voltages


24 V/DC	Art.-No. 260/002031
24 V/AC	Art.-No. 260/002032
230 V/AC	Art.-No. 260/002035

Other voltages available on inquiry

Current consumption

24 V/DC	0,417 A
24 V/AC	0,354 A
230 V/AC	0,039 A

*Function „normally open“ NO P=R

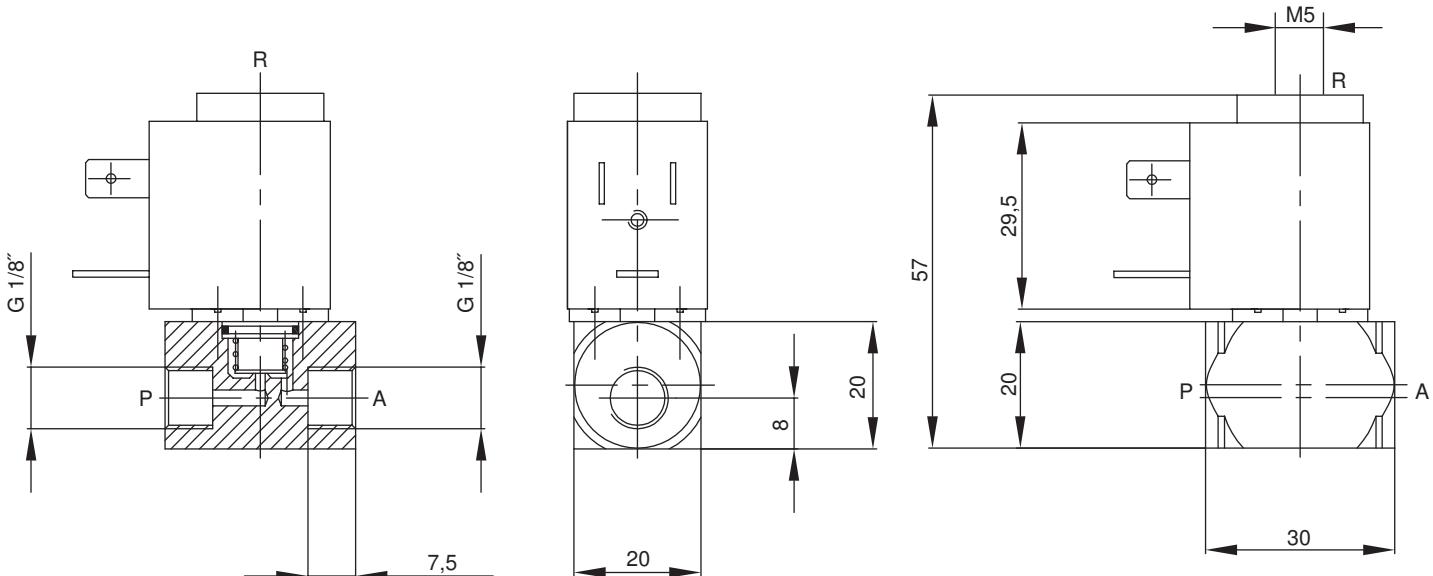

The ventilation connection R can be fitted with a sintered bronze silencer M5 (Art.-No. 215/000010) as ventilation filter.

For the normally open (NO) function the ventilation connection R can be fitted with the M5 - 6 mm hose nozzle (Art.-No. 210/000187) and sealing ring (Art.-No. 233/000023).