


# 2/2-Way-Solenoid-Valve

## Type 01.1.01.002.02

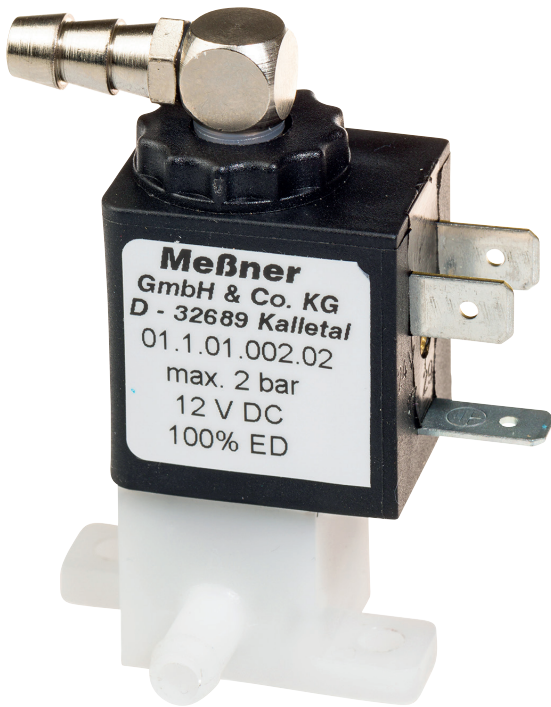

### Technical data

Type of actuation	direct control
Nominal size	2,0 mm
Pump connection P	hose Ø 6 mm
Working connection A	hose Ø 6 mm
Ventilation connection R	internal thread M5
Function	normally closed NC*
Operating pressure	Max. vacuum 99,9 % up to 2 bar
Ambient temperature	max. 80° C
Duty cycle ED	100 %
Enclosure protection in compliance with DIN 40050	IP 00 IP 65 with connector (Art.-No. 229/000002)

### Standard voltages

24 V/DC	Art.-No. 250/002021
24 V/AC	Art.-No. 250/002022
230 V/AC	Art.-No. 250/002025

### Power consumption

24 V/DC	10 W
24 V/AC and 230 V/AC	8,5 VA

### Current consumption

24 V/DC	0,417 A
24 V/AC	0,354 A
230 V/AC	0,039 A

Other voltages available on inquiry

\*Function „normally open“ NO P=R

