


2/2-Way-Solenoid-Valve

Type 01.1.01.004.02

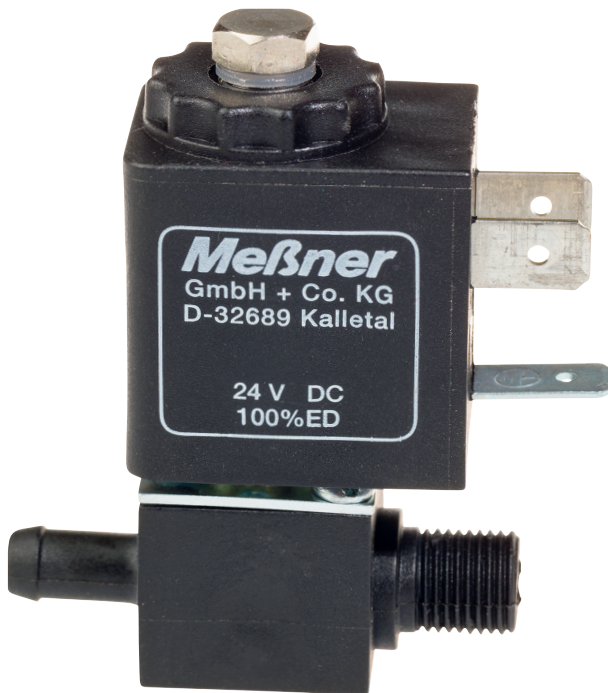

Standard voltages

24 V/DC	Art.-No. 250/004021
24 V/AC	Art.-No. 250/004022
230 V/AC	Art.-No. 250/004025

Other voltages available on inquiry

Technical data

Type of actuation	direct control
Nominal size	3,5 mm
Pump connection P	external thread R 1/8"
Working connection A	hose Ø 6 mm
Function	normally closed NC *
Operating pressure	max. 2,5 bar
Flow medium	neutral gases and liquids
Ambient temperature	max. 80° C
Duty cycle ED	100 %
Enclosure protection in compliance with DIN 40050	IP 00 IP 65 with connector (Art.-No. 229/000002)

Power consumption

24 V/DC	10 W
24 V/AC and 230 V/AC	8,5 VA

Current consumption

24 V/DC	0,417 A
24 V/AC	0,354 A
230 V/AC	0,039 A

*Function „normally open“ NO P=R

