

3/2-Way-Solenoid-Valve

Type 02.1.00.004.01



Technical data

Type of actuation	direct control
Nominal size	3,5 mm
Pump connection P	for hollow screw R 1/8"
Working connection A	hose Ø 6 mm
Ventilation connection R	internal thread M5
Function	normally closed NC
Operating pressure	Max. vacuum 99,9 %
Ambient temperature	max. 80° C
Duty cycle ED	100 %
Enclosure protection in compliance with DIN 40050	IP 00 IP 65 with connector (Art.-No. 229/000002)

Power consumption

24 V/DC	10 W
24 V/AC and 230 V/AC	8,5 VA


Standard voltages

24 V/DC	Art.-No. 262/004011
24 V/AC	Art.-No. 262/004012
230 V/AC	Art.-No. 262/004015

Current consumption

24 V/DC	0,417 A
24 V/AC	0,354 A
230 V/AC	0,039 A

Other voltages available on inquiry

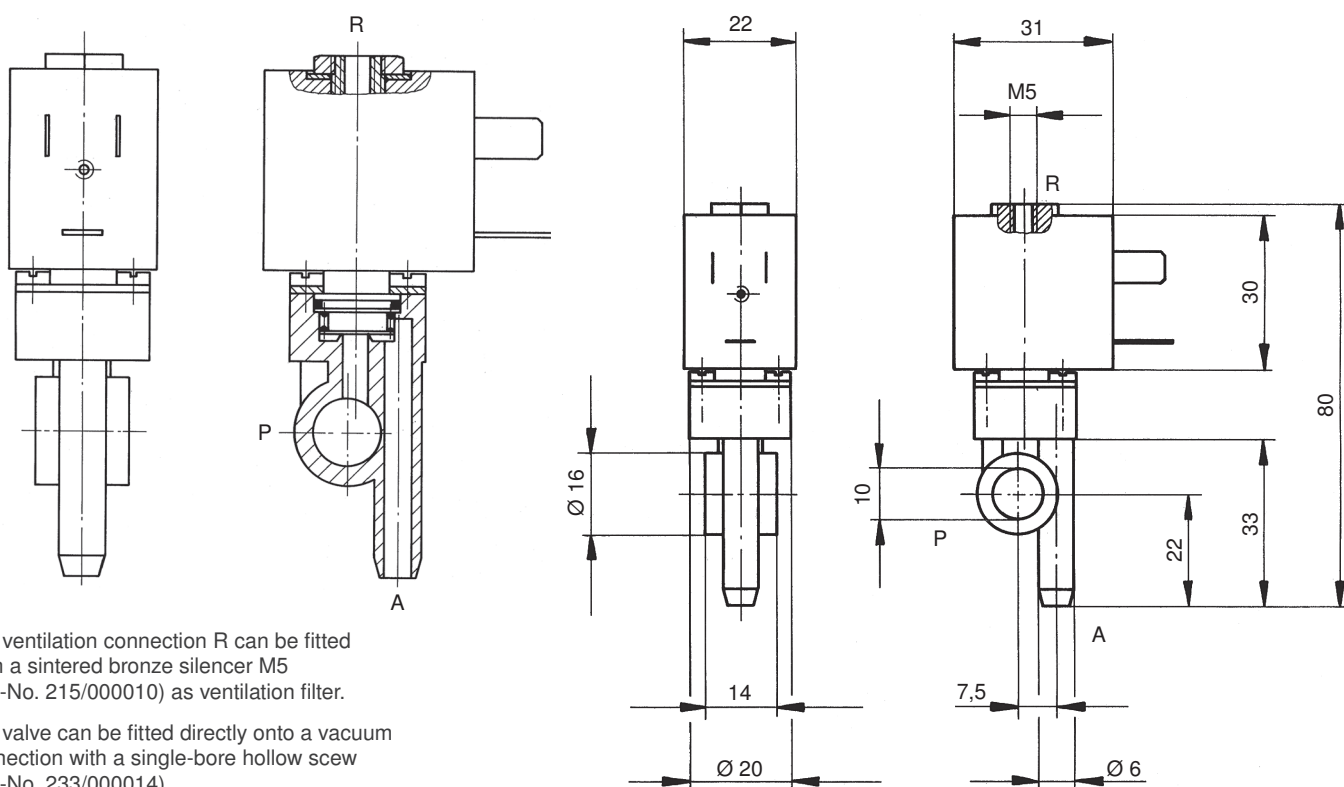

The ventilation connection R can be fitted with a sintered bronze silencer M5 (Art.-No. 215/000010) as ventilation filter.

The valve can be fitted directly onto a vacuum connection with a single-bore hollow screw (Art.-No. 233/000014).