


## Valve Batteries

### Type 05.1.01.006.01

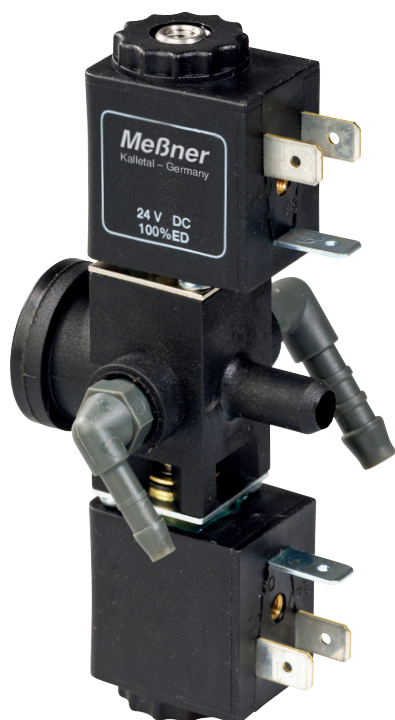

#### Technical data

|                                                   |                                                        |
|---------------------------------------------------|--------------------------------------------------------|
| Type of actuation                                 | direct control                                         |
| Nominal size                                      | Ventilation Valve 6 mm<br>3/2-Way-Valve 3 mm           |
| Connection 1                                      | internal thread R 3/8"                                 |
| Connection 2                                      | hose Ø 8 mm                                            |
| Connection 3                                      | hose Ø 4 mm                                            |
| Connection 4                                      | hose Ø 6 mm                                            |
| Function                                          | Ventilation Valve<br>3/2-Way-Valve                     |
|                                                   | normally closed NC<br>normally closed NC               |
| Operating pressure                                | max. vacuum 99,9 %                                     |
| Ambient temperature                               | max. 80° C                                             |
| Duty cycle ED                                     | 100 %                                                  |
| Enclosure protection in compliance with DIN 40050 | IP 00<br>IP 65 with connector<br>(Art.-No. 229/000002) |

#### Power consumption (per coil)

|                      |        |
|----------------------|--------|
| 24 V/DC              | 10 W   |
| 24 V/AC and 230 V/AC | 8,5 VA |


#### Current consumption (per coil)

|          |         |
|----------|---------|
| 24 V/DC  | 0,417 A |
| 24 V/AC  | 0,354 A |
| 230 V/AC | 0,039 A |

#### Standard voltages

|          |                     |
|----------|---------------------|
| 24 V/DC  | Art.-No. 280/006011 |
| 24 V/AC  | Art.-No. 280/006012 |
| 230 V/AC | Art.-No. 280/006015 |

Other voltages available on inquiry

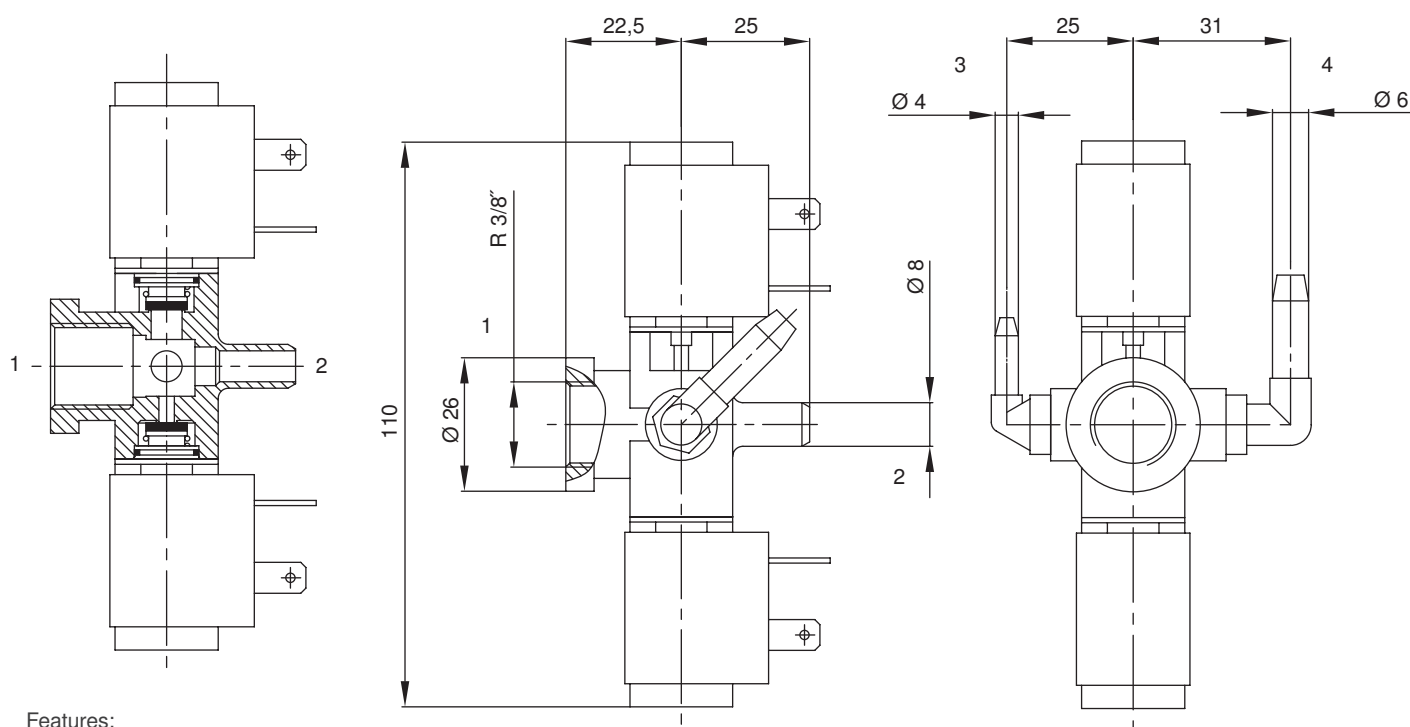

Features:  
Direct mounting on the back of the chamber.  
With vacuum gauge and cylinder connections.