


## 3/2-Way-Solenoid-Valve Type 02.1.01.004.02

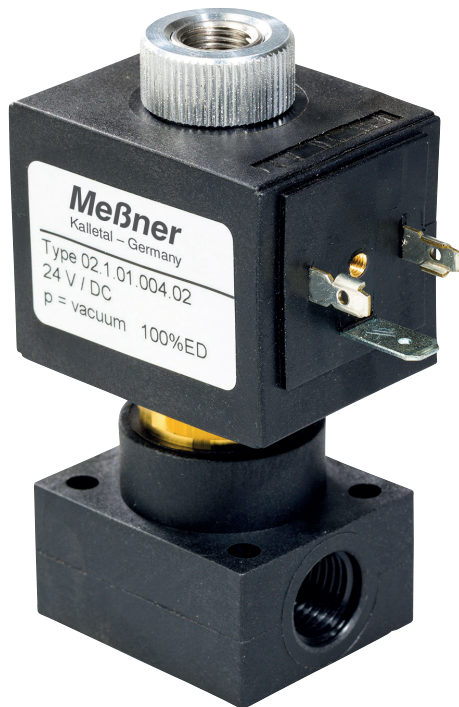

### Technical data

|                                                   |                                                     |
|---------------------------------------------------|-----------------------------------------------------|
| Type of actuation                                 | direct control                                      |
| Nominal size                                      | 4,0 mm                                              |
| Pump connection P                                 | internal thread R 1/4"                              |
| Working connection A                              | internal thread R 1/4"                              |
| Ventilation connection R                          | internal thread R 1/8"                              |
| Function                                          | normally closed NC*                                 |
| Operating pressure                                | max. vacuum 99,9 %                                  |
| Ambient temperature                               | max. 80° C                                          |
| Duty cycle ED                                     | 100 %                                               |
| Enclosure protection in compliance with DIN 40050 | IP 00<br>IP 65 with connector (Art.-No. 229/000003) |

### Power consumption

|                      |       |
|----------------------|-------|
| 24 V/DC              | 13 W  |
| 24 V/AC and 230 V/AC | 13 VA |

### Current consumption


|          |         |
|----------|---------|
| 24 V/DC* | 0,542 A |
| 24 V/AC  | 0,542 A |
| 230 V/AC | 0,059 A |

### Standard voltages

|          |                     |
|----------|---------------------|
| 24 V/DC  | Art.-No. 260/004021 |
| 24 V/AC  | Art.-No. 260/004022 |
| 230 V/AC | Art.-No. 260/004025 |

Other voltages available on inquiry

\*Function „normally open“ NO P=R

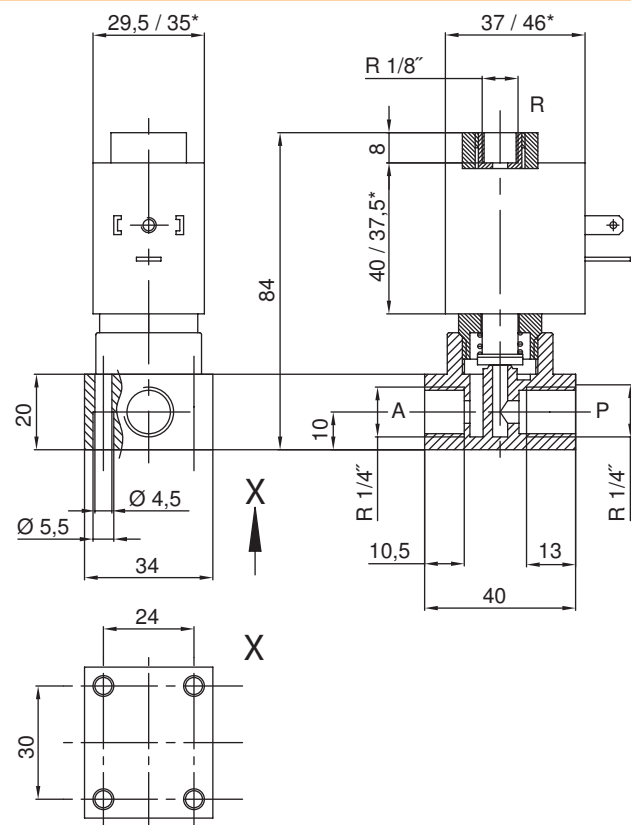

The ventilation connection R can be fitted with a sintered bronze silencer R 1/8" (Art.-No. 215/000011) as ventilation filter.

For the normally open (NO) function the ventilation connection R can be fitted with a hose nozzle R 1/8".